

Contact Information

All initial communication or enquiries should be made to:

Trakm8 Limited

Unit 4,

Roman Park,

Roman Way

Coleshill,

B46 1HG

Commissioning Tel: +44 (0) 330 333 4117

Technical Support Tel: +44 (0) 330 333 4124

E-mail: support@trakm8.com

Document Revision History

Document Issue	Date of Issue	Reason/Description of change
1.0	07/08/2024	Initial Release

Disclaimer

This document is provided for general guidance and informational purposes only. Trakm8 devices should only be installed by professional, qualified installers with the necessary experience and using their own judgement and experience in accordance with industry best practice. The information in this document is provided “as is” and Trakm8 makes no warranty or representation, express or implied, of any kind with regards to this document, including, but not limited to, warranties relating to accuracy, completeness, currency or quality, and Trakm8 specifically disclaims any implied warranties in respect of this document, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. Trakm8 accepts no liability for errors or omissions contained herein, or for any loss, liability or damages (whether direct or indirect) arising in connection with the contents of this document or the supply, performance, or use of this document. Your use of Trakm8 products and services is subject to Trakm8’s terms and conditions of sale or such other terms as have been agreed between us. This document contains Trakm8 confidential and proprietary information, and the copyright and any other intellectual property rights in this document are the property of Trakm8 Limited. No part of this document may be photocopied, reproduced, disclosed, used or translated into another language without the prior written consent of Trakm8 Limited. The information contained in this document is subject to change without notice.

Security


This document is made available upon the understanding that all information contained within should be treated as strictly confidential. It should only be used for the agreed purpose and not be reproduced or distributed in part or in whole to any third parties without the prior consent of trakm8. An agreement of non-disclosure should be signed between trakm8 and any third party before the release of this or any associated documents.

Electrical Connections – RH800 CAB943

CAB943 - 4 Way Power connector	Wire Colour	Function
1	Red	12VDC/24VDC Positive Supply (12V and 24V vehicles)
2	Blue	Ignition Switched Live
3	Black	OEM Ground

Cameras

Channel	Camera
1	Front (MUST BE CONNECTED)
2	Driver
3	Offside or Rear
4	Nearside

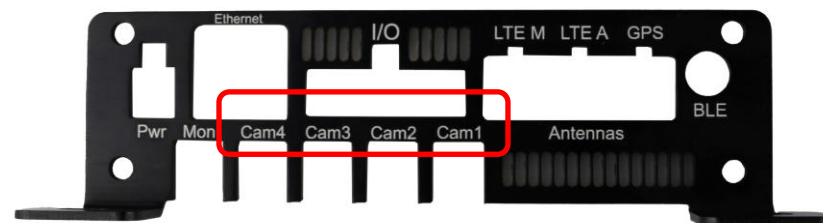

Electrical Connections – RH800 CAB942 - 16 Way Serial I/O connector

CAB942 - 16 Way Serial I/O connector	Wire Colour	Function
1	Green/White	CAN1_High - Twisted Pair 1 FMS/OBD
2	Purple/White	CAN2_High - Twisted Pair 2 Tacho
3	White/Black	Tacho D8 (Driver ID)
4	Purple	INPUT 0
5	White/Blue	INPUT 2 (Offside Camera) (Right hand vehicle indicator)
6	White/Red	RS232_TX1
7	Green	RS232_RX1
8	Black/Yellow	RS232 (Ground)
9	Blue/White	CAN1_Low - Twisted Pair 1 FMS/OBD
10	Red/White	CAN2_Low - Twisted Pair 2 Tacho
11	Yellow	Button/Input
12	Grey	INPUT 1
13	Black/Red	INPUT 3 (Nearside Camera) (Left hand vehicle indicator)
14	Orange	INPUT 4
15	White/Green	INPUT 5
16	Black	Button Input (Ground)